

SEND THE INQUIRY


+48 58 55 40 410

Standards:

ISO 15977

B  
WHITE  
ZINC  
COATING

Coating (standard):

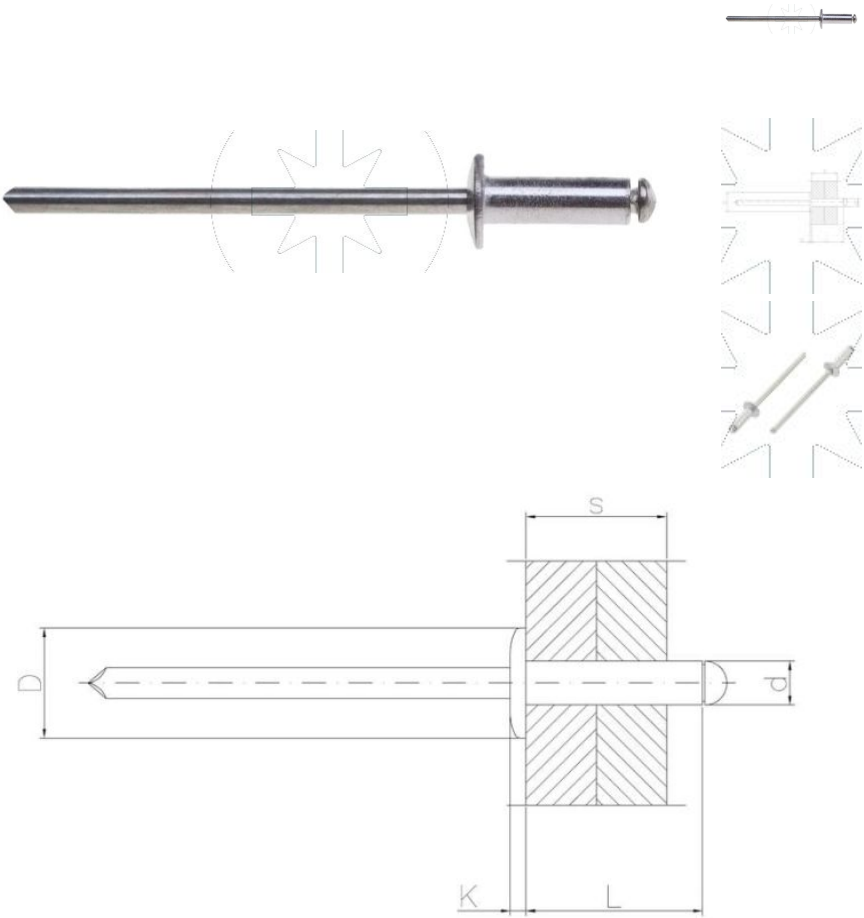

Dimensions

| Material index | d [mm] | L [mm] | D [mm] | s [mm]    | k [mm] | Jednostka miary |
|----------------|--------|--------|--------|-----------|--------|-----------------|
| 2402030060ASK  | 3.0    | 6      | 6.5    | 1.5-3.5   | 0.8    | KG              |
| 2402030060AST  | 3.0    | 6      | 6.5    | 1.5-3.5   | 0.8    | TYS             |
| 2402030080ASK  | 3.0    | 8      | 6.5    | 3.5-5.5   | 0.8    | KG              |
| 2402030080AST  | 3.0    | 8      | 6.5    | 3.5-5.5   | 0.8    | TYS             |
| 2402030100ASK  | 3.0    | 10     | 6.5    | 5.5-7.0   | 0.8    | KG              |
| 2402030100AST  | 3.0    | 10     | 6.5    | 5.5-7.0   | 0.8    | TYS             |
| 2402030120ASK  | 3.0    | 12     | 6.5    | 7.0-9.0   | 0.8    | KG              |
| 2402030120AST  | 3.0    | 12     | 6.5    | 7.0-9.0   | 0.8    | TYS             |
| 2402030140ASK  | 3.0    | 14     | 6.5    | 9.0-11.0  | 0.8    | KG              |
| 2402030140AST  | 3.0    | 14     | 6.5    | 9.0-11.0  | 0.8    | TYS             |
| 2402030160AST  | 3.0    | 16     | 6.5    | 11.0-13.0 | 0.8    | TYS             |
| 2402032060AST  | 3.2    | 6      | 6.5    | 1.5-3.5   | 0.8    | TYS             |
| 2402032080AST  | 3.2    | 8      | 6.5    | 3.5-5.5   | 0.8    | TYS             |
| 2402032100AST  | 3.2    | 10     | 6.5    | 5.5-7.0   | 0.8    | TYS             |
| 2402032120AST  | 3.2    | 12     | 6.5    | 7.0-9.0   | 0.8    | TYS             |
| 2402032160AST  | 3.2    | 16     | 6.5    | 9.0-12.0  | 0.8    | TYS             |

| Material index    | d [mm] | L [mm] | D [mm] | s [mm]    | k [mm] | Jednostka miary |
|-------------------|--------|--------|--------|-----------|--------|-----------------|
| 2402040060ASK     | 4.0    | 6      | 8.0    | 1.5-3.0   | 1.0    | KG              |
| 2402040060AST     | 4.0    | 6      | 8.0    | 1.5-3.0   | 1.0    | TYS             |
| 2402040080AS8017T | 4.0    | 8      | 8.0    | 3.0-5.0   | 1.0    | TYS             |
| 2402040080AS9005T | 4.0    | 8      | 8.0    | 3.0-5.0   | 1.0    | TYS             |
| 2402040080AS9010T | 4.0    | 8      | 8.0    | 3.0-5.0   | 1.0    | TYS             |
| 2402040080ASK     | 4.0    | 8      | 8.0    | 3.0-5.0   | 1.0    | KG              |
| 2402040080AST     | 4.0    | 8      | 8.0    | 3.0-5.0   | 1.0    | TYS             |
| 2402040100AS9005T | 4.0    | 10     | 8.0    | 5.0-6.5   | 1.0    | TYS             |
| 2402040100AS9010T | 4.0    | 10     | 8.0    | 5.0-6.5   | 1.0    | TYS             |
| 2402040100ASK     | 4.0    | 10     | 8.0    | 5.0-6.5   | 1.0    | KG              |
| 2402040100AST     | 4.0    | 10     | 8.0    | 5.0-6.5   | 1.0    | TYS             |
| 2402040120AS9005T | 4.0    | 12     | 8.0    | 6.5-8.5   | 1.0    | TYS             |
| 2402040120AS9010T | 4.0    | 12     | 8.0    | 6.5-8.5   | 1.0    | TYS             |
| 2402040120ASK     | 4.0    | 12     | 8.0    | 6.5-8.5   | 1.0    | KG              |
| 2402040120AST     | 4.0    | 12     | 8.0    | 6.5-8.5   | 1.0    | TYS             |
| 2402040140ASK     | 4.0    | 14     | 8.0    | 8.5-10.5  | 1.0    | KG              |
| 2402040140AST     | 4.0    | 14     | 8.0    | 8.5-10.5  | 1.0    | TYS             |
| 2402040160ASK     | 4.0    | 16     | 8.0    | 10.5-12.5 | 1.0    | KG              |
| 2402040160AST     | 4.0    | 16     | 8.0    | 10.5-12.5 | 1.0    | TYS             |
| 2402040180AST     | 4.0    | 18     | 8.0    | 12.5-14.5 | 1.0    | TYS             |
| 2402040200ASK     | 4.0    | 20     | 8.0    | 14.5-16.5 | 1.0    | KG              |
| 2402040200AST     | 4.0    | 20     | 8.0    | 14.5-16.5 | 1.0    | TYS             |
| 2402040250AST     | 4.0    | 25     | 8.0    | 16.5-21.5 | 1.0    | TYS             |
| 2402040300AST     | 4.0    | 30     | 8.0    | 21.5-26.0 | 1.0    | TYS             |
| 2402048060AST     | 4.8    | 6      | 9.5    | 0.5-3.0   | 1.1    | TYS             |
| 2402048080ASK     | 4.8    | 8      | 9.5    | 3.0-4.5   | 1.1    | KG              |
| 2402048080AST     | 4.8    | 8      | 9.5    | 3.0-4.5   | 1.1    | TYS             |
| 2402048100ASK     | 4.8    | 10     | 9.5    | 4.5-6.0   | 1.1    | KG              |
| 2402048100AST     | 4.8    | 10     | 9.5    | 4.5-6.0   | 1.1    | TYS             |
| 2402048120ASK     | 4.8    | 12     | 9.5    | 6.0-8.0   | 1.1    | KG              |
| 2402048120AST     | 4.8    | 12     | 9.5    | 6.0-8.0   | 1.1    | TYS             |
| 2402048140ASK     | 4.8    | 14     | 9.5    | 8.0-10.0  | 1.1    | KG              |
| 2402048140AST     | 4.8    | 14     | 9.5    | 8.0-10.0  | 1.1    | TYS             |
| 2402048160ASK     | 4.8    | 16     | 9.5    | 10.0-12.0 | 1.1    | KG              |
| 2402048160AST     | 4.8    | 16     | 9.5    | 10.0-12.0 | 1.1    | TYS             |
| 2402048180ASK     | 4.8    | 18     | 9.5    | 12.0-14.0 | 1.1    | KG              |
| 2402048180AST     | 4.8    | 18     | 9.5    | 12.0-14.0 | 1.1    | TYS             |
| 2402048200ASK     | 4.8    | 20     | 9.5    | 12.0-15.0 | 1.1    | KG              |
| 2402048210AST     | 4.8    | 21     | 9.5    | 14.0-16.0 | 1.1    | TYS             |

| Material index | d [mm] | L [mm] | D [mm] | s [mm]    | k [mm] | Jednostka miary |
|----------------|--------|--------|--------|-----------|--------|-----------------|
| 2402048240ASK  | 4.8    | 24     | 9.5    | 16.0-19.0 | 1.1    | KG              |
| 2402048240AST  | 4.8    | 24     | 9.5    | 16.0-19.0 | 1.1    | TYS             |
| 2402048300ASK  | 4.8    | 30     | 9.5    | 20.0-25.0 | 1.1    | KG              |
| 2402048300AST  | 4.8    | 30     | 9.5    | 20.0-25.0 | 1.1    | TYS             |
| 2402048350AST  | 4.8    | 35     | 9.5    | 25.0-30.0 | 1.1    | TYS             |
| 2402050080ASK  | 5.0    | 8      | 9.5    | 3.0-4.5   | 1.1    | KG              |
| 2402050080AST  | 5.0    | 8      | 9.5    | 3.0-4.5   | 1.1    | TYS             |
| 2402050100ASK  | 5.0    | 10     | 9.5    | 4.5-6.0   | 1.1    | KG              |
| 2402050100AST  | 5.0    | 10     | 9.5    | 4.5-6.0   | 1.1    | TYS             |
| 2402050120ASK  | 5.0    | 12     | 9.5    | 6.0-8.0   | 1.1    | KG              |
| 2402050120AST  | 5.0    | 12     | 9.5    | 6.0-8.0   | 1.1    | TYS             |
| 2402050140ASK  | 5.0    | 14     | 9.5    | 8.0-10.0  | 1.1    | KG              |
| 2402050140AST  | 5.0    | 14     | 9.5    | 8.0-10.0  | 1.1    | TYS             |
| 2402050160ASK  | 5.0    | 16     | 9.5    | 10.0-11.5 | 1.1    | KG              |
| 2402050160AST  | 5.0    | 16     | 9.5    | 10.0-11.5 | 1.1    | TYS             |
| 2402050180ASK  | 5.0    | 18     | 9.5    | 12.0-14.0 | 1.1    | KG              |
| 2402050180AST  | 5.0    | 18     | 9.5    | 12.0-14.0 | 1.1    | TYS             |
| 2402050200ASK  | 5.0    | 20     | 9.5    | 13.0-15.0 | 1.1    | KG              |
| 2402050200AST  | 5.0    | 20     | 9.5    | 13.0-15.0 | 1.1    | TYS             |
| 2402050250AST  | 5.0    | 25     | 9.5    | 16.0-21.0 | 1.1    | TYS             |
| 2402050300AST  | 5.0    | 30     | 9.5    | 21.0-25.0 | 1.1    | TYS             |
| 2402060100AST  | 6.0    | 10     | 12.0   | 3.0-4.5   | 1.5    | TYS             |
| 2402060120ASK  | 6.0    | 12     | 12.0   | 4.5-6.0   | 1.5    | KG              |
| 2402060120AST  | 6.0    | 12     | 12.0   | 4.5-6.0   | 1.5    | TYS             |
| 2402060160ASK  | 6.0    | 16     | 12.0   | 8.5-12.0  | 1.5    | KG              |
| 2402060160AST  | 6.0    | 16     | 12.0   | 8.5-12.0  | 1.5    | TYS             |
| 2402060180ASK  | 6.0    | 18     | 12.0   | 10.5-12.5 | 1.5    | KG              |
| 2402060180AST  | 6.0    | 18     | 12.0   | 10.5-12.5 | 1.5    | TYS             |
| 2402060200AST  | 6.0    | 20     | 12.0   | 11.0-15.0 | 1.5    | TYS             |
| 2402060250AST  | 6.0    | 25     | 12.0   | 15.0-19.0 | 1.5    | TYS             |
| 2402060300AST  | 6.0    | 30     | 12.0   | 19.0-25.0 | 1.5    | TYS             |