

SEND THE INQUIRY

+48 58 55 40 410


Standards:

DIN 125  
GOST 11379-68  
ISO 7089, ISO 7091  
PN-M 82005

Material:

A2

A4

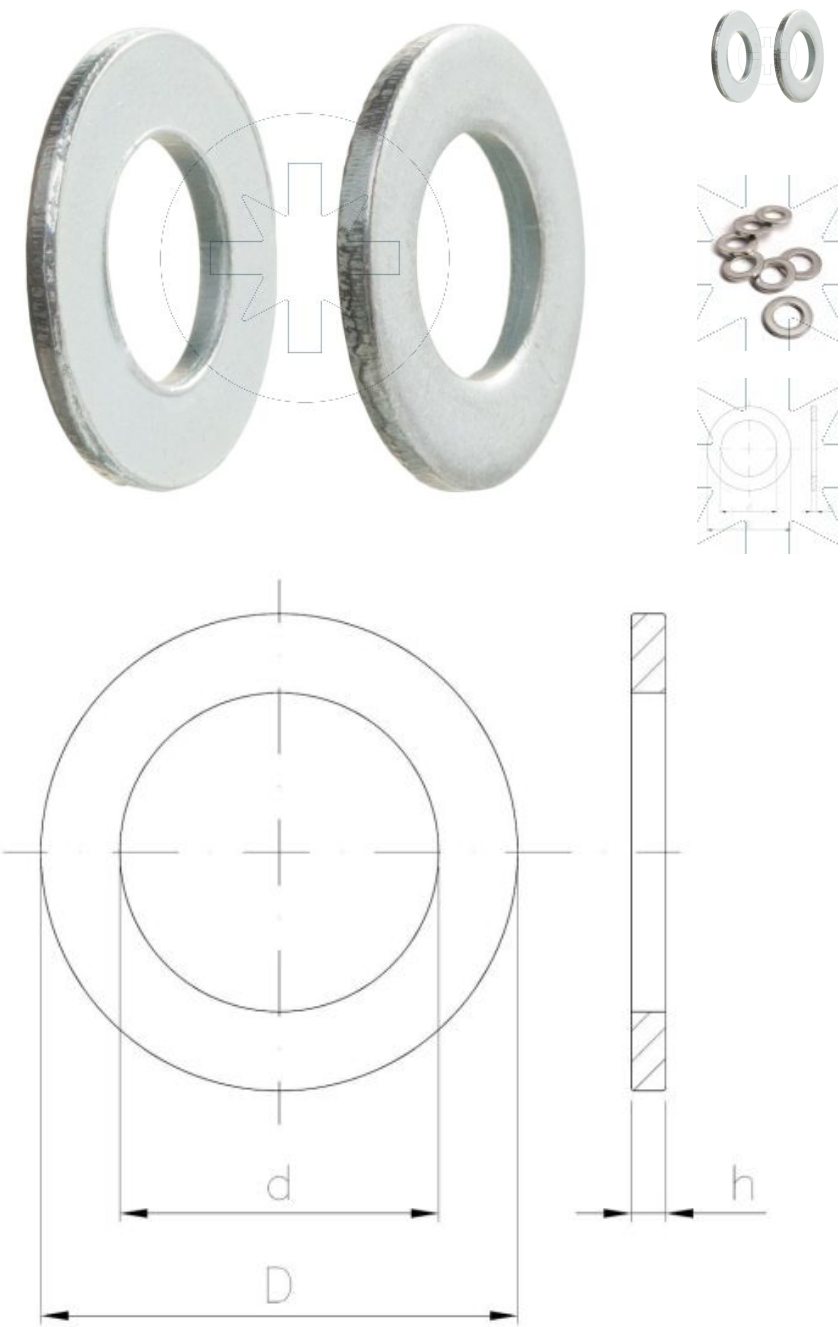

Dimensions

| Material index  | d [mm] | D [mm] | h [mm] | Materials                  |
|-----------------|--------|--------|--------|----------------------------|
| I1401050A2D125T | 5.3    | 10     | 1.0    | A2 (stainless steel)       |
| I1401050A4D125T | 5.3    | 10     | 1.0    | A4 (acids resistant steel) |
| I1401060A4D125T | 6.4    | 12     | 1.6    | A4 (acids resistant steel) |
| I1401060A2D125T | 6.4    | 12     | 1.6    | A2 (stainless steel)       |
| I1401080A2D125T | 8.4    | 16     | 1.6    | A2 (stainless steel)       |
| I1401080A4D125T | 8.4    | 16     | 1.6    | A4 (acids resistant steel) |
| I1401100A2D125T | 10.5   | 20     | 2.0    | A2 (stainless steel)       |
| I1401100A4D125S | 10.5   | 20     | 2.0    | A4 (acids resistant steel) |
| I1401120A4D125S | 13.0   | 24     | 2.5    | A4 (acids resistant steel) |

| Material index  | d [mm] | D [mm] | h [mm] | Materials                  |
|-----------------|--------|--------|--------|----------------------------|
| I1401120A2D125S | 13.0   | 24     | 2.5    | A2 (stainless steel)       |
| I1401140A2D125S | 15.0   | 28     | 2.5    | A2 (stainless steel)       |
| I1401160A2D125T | 17.0   | 30     | 3.0    | A2 (stainless steel)       |
| I1401160A4D125S | 17.0   | 30     | 3.0    | A4 (acids resistant steel) |
| I1401200A2D125T | 21.0   | 37     | 3.0    | A2 (stainless steel)       |
| I1401040A2D125T | 4.3    | 9.0    | 0.8    | A2 (stainless steel)       |