

SEND THE INQUIRY


+48 58 55 40 410

Standards:

ISO 15979

Coating (standard):

B  
WHITE  
ZINC  
COATING

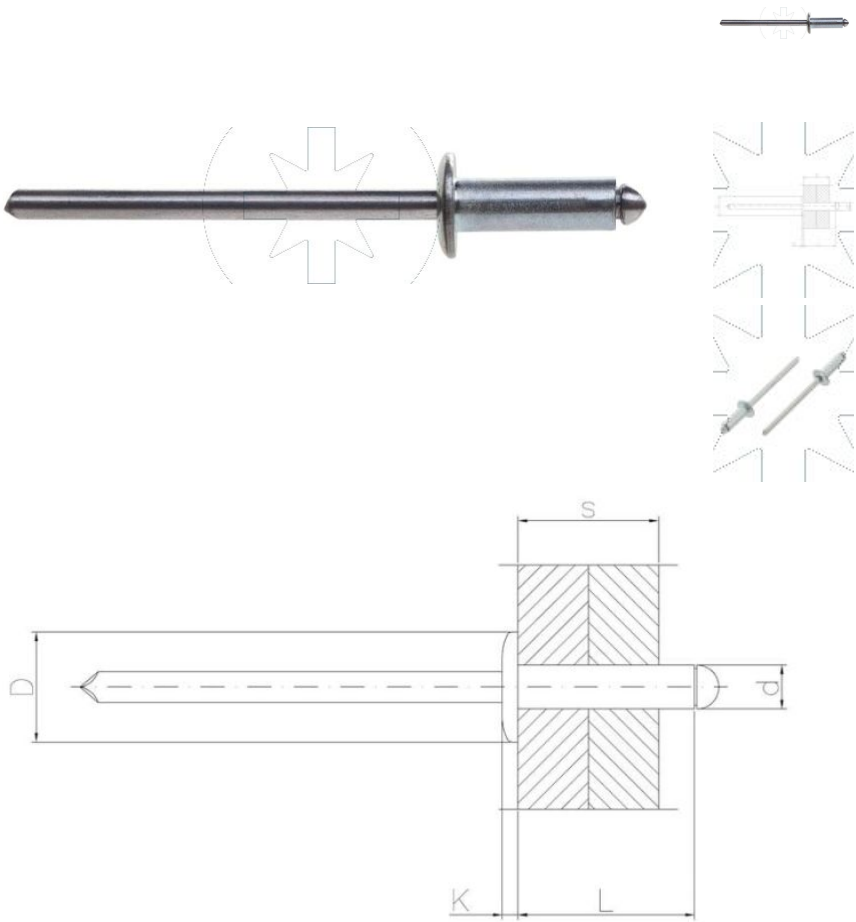

| Dimensions     |        |        |        |           |        |
|----------------|--------|--------|--------|-----------|--------|
| Material index | d [mm] | L [mm] | D [mm] | s [mm]    | k [mm] |
| 2401064150SST  | 6.4    | 15     | 13.0   | 6.0-9.0   | 1.8    |
| 2401064200SST  | 6.4    | 20     | 13.0   | 12.0-14.0 | 1.8    |
| 2401064300SST  | 6.4    | 30     | 13.0   | 19.0-24.0 | 1.8    |
| 2401064250SST  | 6.4    | 25     | 13.0   | 13.0-19.0 | 1.8    |
| 2401064120SST  | 6.4    | 12     | 13.0   | 2.0-6.0   | 1.8    |
| 2401064180SST  | 6.4    | 18     | 13.0   | 9.0-12.0  | 1.8    |
| 2401060100SST  | 6.0    | 10     | 12.0   | 3.0-4.5   | 1.5    |
| 2401060160SST  | 6.0    | 16     | 12.0   | 8.5-12.0  | 1.5    |
| 2401060120SST  | 6.0    | 12     | 12.0   | 4.5-6.0   | 1.5    |
| 2401060180SST  | 6.0    | 18     | 12.0   | 10.5-12.5 | 1.5    |
| 2401060300SST  | 6.0    | 30     | 12.0   | 19.0-25.0 | 1.5    |
| 2401050160SST  | 5.0    | 16     | 9.5    | 10.0-11.5 | 1.1    |
| 2401050300SST  | 5.0    | 30     | 9.5    | 21.0-25.0 | 1.1    |
| 2401050120SST  | 5.0    | 12     | 9.5    | 6.0-8.0   | 1.1    |
| 2401050140SST  | 5.0    | 14     | 9.5    | 8.0-10.0  | 1.1    |
| 2401050100SST  | 5.0    | 10     | 9.5    | 4.5-6.0   | 1.1    |

| Material index | d [mm] | L [mm] | D [mm] | s [mm]    | k [mm] |
|----------------|--------|--------|--------|-----------|--------|
| 2401050250SST  | 5.0    | 25     | 9.5    | 16.0-21.0 | 1.1    |
| 2401050180SST  | 5.0    | 18     | 9.5    | 12.0-14.0 | 1.1    |
| 2401050200SST  | 5.0    | 20     | 9.5    | 13.0-15.0 | 1.1    |
| 2401050080SST  | 5.0    | 8      | 9.5    | 3.0-4.5   | 1.1    |
| 2401048240SST  | 4.8    | 24     | 9.5    | 16.0-19.0 | 1.1    |
| 2401048100SST  | 4.8    | 10     | 9.5    | 4.5-6.0   | 1.1    |
| 2401048120SST  | 4.8    | 12     | 9.5    | 6.0-8.0   | 1.1    |
| 2401048350SST  | 4.8    | 35     | 9.5    | 25.0-30.0 | 1.1    |
| 2401048300SST  | 4.8    | 30     | 9.5    | 20.0-25.0 | 1.1    |
| 2401048160SST  | 4.8    | 16     | 4.8    | 10.0-12.0 | 1.1    |
| 2401048140SST  | 4.8    | 14     | 9.5    | 8.0-10.0  | 1.1    |
| 2401048200SST  | 4.8    | 20     | 9.5    | 12.0-15.0 | 1.1    |
| 2401048060SST  | 4.8    | 6      | 9.5    | 0.5-3.0   | 1.1    |
| 2401048080SST  | 4.8    | 8      | 9.5    | 3.0-4.5   | 1.1    |
| 2401048180SST  | 4.8    | 18     | 9.5    | 12.0-14.0 | 1.1    |
| 2401048210SST  | 4.8    | 21     | 9.5    | 14.0-16.0 | 1.1    |
| 2401040160SST  | 4.0    | 16     | 8.0    | 10.5-12.5 | 1.0    |
| 2401040080SST  | 4.0    | 8      | 8.0    | 3.0-5.0   | 1.0    |
| 2401040180SST  | 4.0    | 18     | 8.0    | 12.5-14.5 | 1.0    |
| 2401040120SST  | 4.0    | 12     | 8.0    | 6.5-8.5   | 1.0    |
| 2401040060SST  | 4.0    | 6      | 8.0    | 1.5-3.0   | 1.0    |
| 2401040140SST  | 4.0    | 14     | 8.0    | 8.5-10.5  | 1.0    |
| 2401040200SST  | 4.0    | 20     | 8.0    | 14.5-16.5 | 1.0    |
| 2401040100SST  | 4.0    | 10     | 8.0    | 5.0-6.5   | 1.0    |
| 2401032120SST  | 3.2    | 12     | 6.5    | 7.0-9.0   | 0.8    |
| 2401032060SST  | 3.2    | 6      | 6.5    | 1.5-3.5   | 0.8    |
| 2401032080SST  | 3.2    | 8      | 6.5    | 3.5-5.5   | 0.8    |
| 2401032100SST  | 3.2    | 10     | 6.5    | 5.5-7.0   | 0.8    |
| 2401030120SST  | 3.0    | 12     | 6.5    | 7.0-9.0   | 0.8    |
| 2401030080SST  | 3.0    | 8      | 6.5    | 3.5-5.5   | 0.8    |
| 2401030100SST  | 3.0    | 10     | 6.5    | 5.5-7.0   | 0.8    |
| 2401030060SST  | 3.0    | 6      | 6.5    | 1.5-3.5   | 0.8    |