



I11.08
SZG

Carriage bolt fully threaded

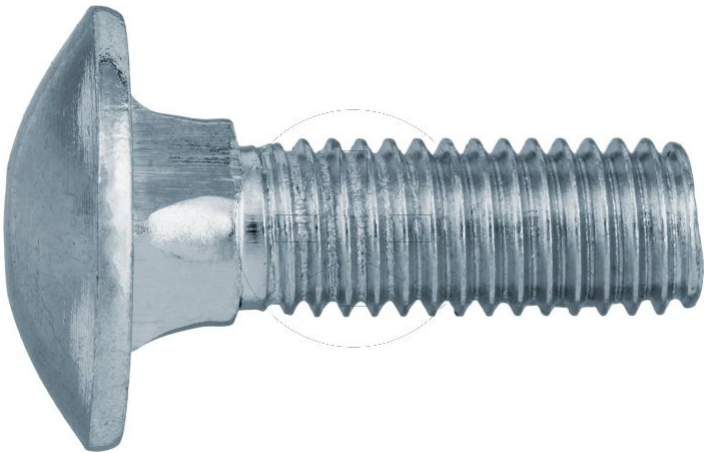

Material:


SEND THE INQUIRY

+48 58 55 40 410

Standards:

DIN 603
ISO 8677
PN-M 82406

A2

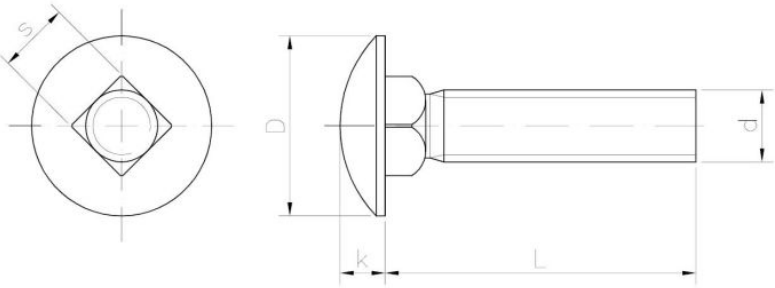

Dimensions

Material index	d	L [mm]	D [mm]	k [mm]	s [mm]	Materials
I1108060030A2D603T	M6	30	16.0	3.5	6.0	A2 (stainless steel)
I1108060016A2D603T	M6	16	16.0	3.5	6.0	A2 (stainless steel)
I1108080035A2D603T	M8	35	20.0	5.0	8.0	A2 (stainless steel)
I1108080030A2D603T	M8	30	20.0	5.0	8.0	A2 (stainless steel)
I1108080025A2D603T	M8	25	20.0	5.0	8.0	A2 (stainless steel)
I1108080020A2D603T	M8	20	20.0	5.0	8.0	A2 (stainless steel)
I1108100040A2D603S	M10	40	24.0	6.0	10.0	A2 (stainless steel)
I1108100025A2D603S	M10	25	24.0	6.0	10.0	A2 (stainless steel)