

DECLARATION of PERFORMANCE

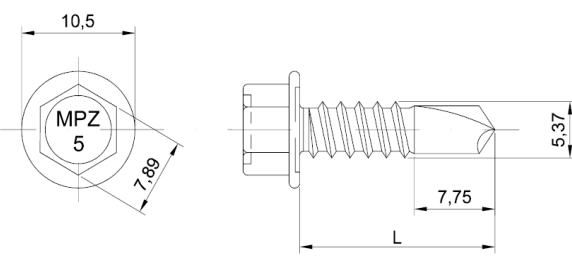
No 03/MPT5/0371/2023



1. *Unique identification code of the product-type:* **MPT5, MPT5+(A14/A16/I14/I16)**
2. *Intended use:* **MPT 5 self-drilling screws are intended to be used for fastening steel sheeting to steel supporting structures.**
3. *Name, registered trade name or registered trade mark and contact address of the manufacturer:* **Marcopol Sp. z o.o. Producer of Bolts str. Oliwska 100, 80-209 Chwaszczyno Poland**
4. *System or systems of assessment and verification of constancy of performance of the construction product:* **System "2+" of assessment**
5. *European Technical Assessment:* **ETA 18/0371 issued 05.10.2023**
Technical Assessment Body: **Technický a zkušební ústav stavební Praha, s.p.**
Notified Body: **Number: 1020 - Technický a zkušební ústav stavební Praha, s.p.**
6. *Declared performance:*

	Essential characteristics	Performance	Technical specification
3.1 BWR 1: Mechanical resistance and stability			
3.1.1	Characteristic Shear Resistance of the Connection	see Table 1 ÷ 5 below	ETA 18/0371
3.1.2	Characteristic Tension Resistance of the Connection	see Table 1 ÷ 5 below	ETA 18/0371
3.1.3	Design Resistance in case of combined Tension and Shear Forces (interaction)	No Performance Assessed	ETA 18/0371
3.1.4	Check of Deformation Capacity in case of constraining forces due to temperature	No Performance Assessed	ETA 18/0371
3.1.5	Durability		
	Ceramic coating Ruspert Silver	according to individual Producer documentation C3 medium, C4 low	ETA 18/0371
3.2 BWR 2: Safety in case of fire			
3.2.1	Reaction to fire	The performance of the product is class A1	EN 13501-1

Table 1: Characteristic Tension Resistance $N_{R,k}$ and Shear Resistance $V_{R,k}$ [kN]

	Materials Fastener: carbon steel – SAE1022 quenched, tempered and galvanized ($\geq 12 \mu\text{m}$) Washer: - Component I: S280GD, S320GD or S350GD – EN 10346 Component II: S235 – EN 10025-1
	Drilling capacity: $\Sigma(t_{N2} + t_{II}) \leq 6,50 \text{ mm}$
	Timber substructures no performance determined

$t_{N,II}$ [mm]	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	Wood class $\geq \text{C24}$		
$M_{t,nom}$	5 Nm										—	—	
$V_{R,k}$ [kN] for $t_{N,I}$ [mm] 0,75 0,88 1,00 1,13 1,25 1,50 1,75 2,00	1,23	1,23	1,23	1,23	1,23	—	—	—	—	—	—	—	*bearing resistance of component I **bearing resistance of component II
	1,31	1,31	1,31	1,31	1,31	—	—	—	—	—	—	—	
	1,64	1,64	1,64	1,64	1,64	—	—	—	—	—	—	—	
	1,64	1,64	1,64	1,64	1,64	—	—	—	—	—	—	—	
	1,72	1,72	1,72	1,72	1,72	—	—	—	—	—	—	—	
	—	—	—	—	—	—	—	—	—	—	—	—	
	—	—	—	—	—	—	—	—	—	—	—	—	
	—	—	—	—	—	—	—	—	—	—	—	—	
$N_{R,k}$ [kN] for $t_{N,I}$ [mm] 0,75 0,88 1,00 1,13 1,25 1,50 1,75 2,00	1,22	1,38	1,38	1,38	1,38	—	—	—	—	—	—	—	*bearing resistance of component II **bearing resistance of component I
	1,22	1,45	1,45	1,45	1,45	—	—	—	—	—	—	—	
	1,22	2,00	2,00	2,00	2,00	—	—	—	—	—	—	—	
	1,22	2,00	2,00	2,00	2,00	—	—	—	—	—	—	—	
	1,22	2,00	2,06	2,06	2,06	—	—	—	—	—	—	—	
	—	—	—	—	—	—	—	—	—	—	—	—	
	—	—	—	—	—	—	—	—	—	—	—	—	
	—	—	—	—	—	—	—	—	—	—	—	—	

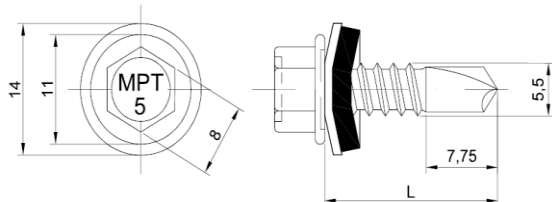
 If both components I and II are made of S320GD the values $V_{R,k}$ may be increased by 8,3%

 If both components I and II are made of S350GD the values $V_{R,k}$ may be increased by 16,6%

MPZ5 fastening screws for metal members and sheeting

 MPZ5 5,5 × L
 with hexagon head

Table 1

Table 2: Characteristic Tension Resistance $N_{R,k}$ and Shear Resistance $V_{R,k}$ [kN]

Materials

Fastener: carbon steel – SAE1022
quenched, tempered and galvanized (Ruspert Silver)

Washer: EPDM sealing ring with metal top
made of aluminum

Component I: S280GD, S320GD or S350GD – EN 10346

Component II: S235 – EN 10025-1

Drilling capacity: $\Sigma(t_{N2} + t_{II}) \leq 6,50$ mm

Timber substructures

no performance determined

$t_{N,II}$ [mm]	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	Wood class \geq C24		
$M_{t,nom}$	5 Nm										—	—	
$V_{R,k}$ [kN] for $t_{N,I}$ [mm]	0,75	1,23	1,23	1,23	1,23	—	—	—	—	—	—	—	*bearing resistance of component I **bearing resistance of component II
	0,88	1,31	1,31	1,31	1,31	—	—	—	—	—	—	—	
	1,00	1,64	1,64	1,64	1,64	—	—	—	—	—	—	—	
	1,13	1,64	1,64	1,64	1,64	—	—	—	—	—	—	—	
	1,25	1,72	1,72	1,72	1,72	—	—	—	—	—	—	—	
	1,50	1,72	1,72	1,72	1,72	—	—	—	—	—	—	—	
	1,75	—	—	—	—	—	—	—	—	—	—	—	
	2,00	—	—	—	—	—	—	—	—	—	—	—	
$N_{R,k}$ [kN] for $t_{N,I}$ [mm]	0,75	1,22	3,12	3,33	3,33	—	—	—	—	—	—	—	*bearing resistance of component II **bearing resistance of component I
	0,88	1,22	3,12	3,33	4,00	—	—	—	—	—	—	—	
	1,00	1,22	3,12	3,33	4,19	—	—	—	—	—	—	—	
	1,13	1,22	3,12	3,33	4,19	—	—	—	—	—	—	—	
	1,25	1,22	3,12	3,33	4,21	—	—	—	—	—	—	—	
	1,50	1,22	3,12	3,33	4,21	—	—	—	—	—	—	—	
	1,75	—	—	—	—	—	—	—	—	—	—	—	
	2,00	—	—	—	—	—	—	—	—	—	—	—	

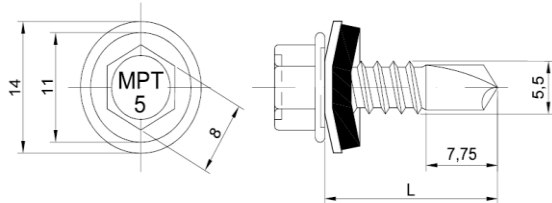
If both components I and II are made of S320GD the values $V_{R,k}$ may be increased by 8,3%

If both components I and II are made of S350GD the values $V_{R,k}$ may be increased by 16,6%

MPT 5 fastening screws for metal members and sheeting

MPT 5 5,5 × L + A14
with hexagon head and sealing washer $\geq \varnothing 14$ mm
with metal top made of aluminum

Table 2

Table 3: Characteristic Tension Resistance $N_{R,k}$ and Shear Resistance $V_{R,k}$ [kN]

Materials

 Fastener: carbon steel – SAE1022
 quenched, tempered and galvanized (Ruspert Silver)

 Washer: EPDM sealing ring with metal top
 made of stainless steel

Component I: S280GD, S320GD or S350GD – EN 10346

Component II: S235 – EN 10025-1

 Drilling capacity: $\Sigma(t_{N2} + t_{II}) \leq 6,50$ mm

Timber substructures

no performance determined

$t_{N,II}$ [mm]	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	Wood class \geq C24		
$M_{t,nom}$	5 Nm										—	—	
$V_{R,k}$ [kN] for $t_{N,I}$ [mm]	0,75 0,88 1,00 1,13 1,25 1,50 1,75 2,00	1,23 1,31 1,64 1,64 1,72 1,72 — —	1,23 1,31 1,64 1,64 1,72 1,72 — —	1,23 1,31 1,64 1,64 1,72 1,72 — —	1,23 1,31 1,64 1,64 1,72 1,72 — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	*bearing resistance of component I **bearing resistance of component II
$N_{R,k}$ [kN] for $t_{N,I}$ [mm]	0,75 0,88 1,00 1,13 1,25 1,50 1,75 2,00	1,22 1,22 1,22 1,22 1,22 1,22 — —	3,12 3,12 3,12 3,12 3,12 3,12 — —	3,33 3,33 3,33 3,33 3,33 3,33 — —	3,33 4,04 4,23 4,23 4,26 4,26 — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	*bearing resistance of component II **bearing resistance of component I

 If both components I and II are made of S320GD the values $V_{R,k}$ may be increased by 8,3%

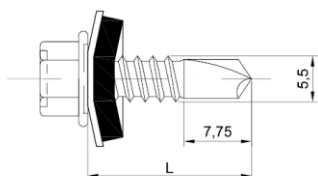
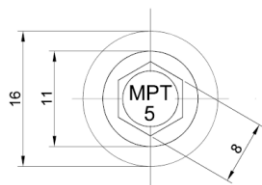
 If both components I and II are made of S350GD the values $V_{R,k}$ may be increased by 16,6%

MPT 5 fastening screws for metal members and sheeting

MPT 5 5,5 × L + I14

 with hexagon head and sealing washer $\geq \varnothing 14$ mm
 with metal top made of stainless steel

Table 3

Table 4: Characteristic Tension Resistance $N_{R,k}$ and Shear Resistance $V_{R,k}$ [kN]

Materials

 Fastener: carbon steel – SAE1022
 quenched, tempered and galvanized (Ruspert Silver)

 Washer: EPDM sealing ring with metal top
 made of stainless steel

Component I: S280GD, S320GD or S350GD – EN 10346

Component II: S235 – EN 10025-1

 Drilling capacity: $\Sigma(t_{N2} + t_{II}) \leq 6,50$ mm

Timber substructures

no performance determined

$t_{N,II}$ [mm]	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	Wood class \geq C24		
$M_{t,nom}$	5 Nm										—	—	
$V_{R,k}$ [kN] for $t_{N,I}$ [mm]	0,75	1,23	1,23	1,23	1,23	—	—	—	—	—	—	—	*bearing resistance of component I **bearing resistance of component II
	0,88	1,31	1,31	1,31	1,31	—	—	—	—	—	—	—	
	1,00	1,64	1,64	1,64	1,64	—	—	—	—	—	—	—	
	1,13	1,64	1,64	1,64	1,64	—	—	—	—	—	—	—	
	1,25	1,72	1,72	1,72	1,72	—	—	—	—	—	—	—	
	1,50	1,72	1,72	1,72	1,72	—	—	—	—	—	—	—	
	1,75	—	—	—	—	—	—	—	—	—	—	—	
	2,00	—	—	—	—	—	—	—	—	—	—	—	
$N_{R,k}$ [kN] for $t_{N,I}$ [mm]	0,75	1,22	3,12	3,33	3,33	—	—	—	—	—	—	—	*bearing resistance of component II **bearing resistance of component I
	0,88	1,22	3,12	3,68	4,04	—	—	—	—	—	—	—	
	1,00	1,22	3,12	3,68	4,23	—	—	—	—	—	—	—	
	1,13	1,22	3,12	3,68	4,23	—	—	—	—	—	—	—	
	1,25	1,22	3,12	3,68	4,26	—	—	—	—	—	—	—	
	1,50	1,22	3,12	3,68	4,26	—	—	—	—	—	—	—	
	1,75	—	—	—	—	—	—	—	—	—	—	—	
	2,00	—	—	—	—	—	—	—	—	—	—	—	

 If both components I and II are made of S320GD the values $V_{R,k}$ may be increased by 8,3%

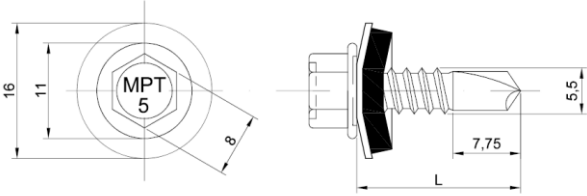
 If both components I and II are made of S350GD the values $V_{R,k}$ may be increased by 16,6%

MPT 5 fastening screws for metal members and sheeting
MPT 5 5,5 × L + I16

 with hexagon head and sealing washer $\geq \varnothing 16$ mm
 with metal top made of stainless steel

Table 4

Table 5: Characteristic Tension Resistance $N_{R,k}$ and Shear Resistance $V_{R,k}$ [kN]

	Materials Fastener: carbon steel – SAE1022 quenched, tempered and galvanized (Ruspert Silver) Washer: EPDM sealing ring with metal top made of aluminum Component I: S280GD, S320GD or S350GD – EN 10346 Component II: S235 – EN 10025-1
	Drilling capacity: $\Sigma(t_{N2} + t_{II}) \leq 6,50$ mm
	Timber substructures no performance determined

$t_{N,II}$ [mm]	1,00	2,00	3,00	4,00	5,00	6,00	7,00	8,00	9,00	10,00	Wood class \geq C24		
M_{Lnom}			5 Nm								—	—	
$V_{R,k}$ [kN] for $t_{N,I}$ [mm]	0,75 0,88 1,00 1,13 1,25 1,50 1,75 2,00	1,23 1,31 1,64 1,64 1,72 1,72 — —	1,23 1,31 1,64 1,64 1,72 1,72 — —	1,23 1,31 1,64 1,64 1,72 1,72 — —	1,23 1,31 1,64 1,64 1,72 1,72 — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	*bearing resistance of component I **bearing resistance of component II
$N_{R,k}$ [kN] for $t_{N,I}$ [mm]	0,75 0,88 1,00 1,13 1,25 1,50 1,75 2,00	1,22 1,22 1,22 1,22 1,22 1,22 — —	3,12 3,12 3,12 3,12 3,12 3,12 — —	3,33 3,68 3,68 3,68 3,68 3,68 — —	3,33 4,04 4,23 4,23 4,26 4,26 — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	— — — — — — — —	*bearing resistance of component II **bearing resistance of component I

If both components I and II are made of S320GD the values $V_{R,k}$ may be increased by 8,3%
 If both components I and II are made of S350GD the values $V_{R,k}$ may be increased by 16,6%

MPT 5 fastening screws for metal members and sheeting

MPT 5 5,5 × L + A16
 with hexagon head and sealing washer $\geq \varnothing 16$ mm
 with metal top made of aluminum

Table 5

7. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 6

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 3.

Signed by:

Chwaszczyno, 10.11.2023



Janusz Kabala